


APR Drone Battery Pack – 300 Wh/kg

Drones operating in defense environments face demanding thermal conditions. The APR Drone Battery Pack combines high energy density NMC cells with integrated dielectric immersion cooling, delivering stable performance from -50°C to +55°C, fast recharge in 18 minutes and a 2000-cycle service life. Capacity, voltage and form factor are customizable to platform requirements.

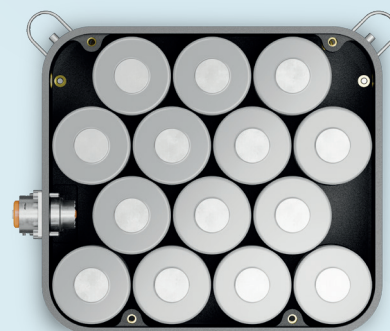

Benefits

Operational in extreme temperature

Integrated heater and cooler using dielectric liquid maintains stable cell temperature across -50°C to +55°C.

Maximized flight time

High energy density NMC technology delivers up to 300 Wh/kg at system level.

Long service life, fast charging

2000 cycles at over 80% capacity retention, with fast charge from 10 to 80% in 18 minutes.

Custom design

Voltage, capacity and form factor are configurable to fit your platform.



Applications

Defense UAV platforms operating in demanding environments require power systems that perform without compromise. From arctic reconnaissance to desert surveillance, this battery pack is designed for electric drones where mission reliability and performance are non-negotiable. Typical applications include long-endurance ISR drones, logistics UAVs and autonomous systems operating in extreme conditions.



Technical Data

Cell configuration	14S 1P
Battery cell and chemistry	4695 NMC
Energy density (pack level)	Up to 300 Wh/kg
Battery pack nominal voltage	50.4 V
Battery pack capacity	44 Ah
Battery pack energy	2.2 kWh
Battery pack operating voltage	42 – 60 V
Max discharge (30s burst)	3 C (6 C)
Operating temperature	-50°C - +55°C
IP rating	IP67
Battery module weight	approx 7.3 kg
Cycle life @ 1C (25 °C)	2000 cycles > 80 %
Fast charge 10 to 80 % (25 °C)	18 min

About APR

APR Technologies is a Swedish deep tech company, developing and producing high-performance liquid cooling solutions for applications in chip cooling, batteries, space and defence. The technology directs cooling liquid flow directly to the heat source using no moving parts and is protected by more than 70 granted patents in 22 countries. APR Technologies is headquartered in Enköping, Sweden.

Disclaimer This battery pack is a demonstration unit developed for evaluation and testing in electric drone applications. The specifications, performance characteristics, and other technical data provided in this datasheet are preliminary, and subject to change without notice. This product is not a production-ready unit and has not been fully validated for durability, safety, or regulatory compliance required for drones. It may not meet applicable standards, certifications, or requirements.

APR Technologies
Västra Järnväggsgatan 4
745 39 Enköping, Sweden

info@aprtec.com

www.aprtec.com

